



P.O BOX 404

11518 N. PORT WASHINGTON RD • MEQUON, WI 53092-0404

Phone 262-241-5900 • FAX 262-241-5376 • EMAIL: REPCOR@SBCGLOBAL.NET

LETTER OF COMPLIANCE

TO WHOM IT MAY CONCERN

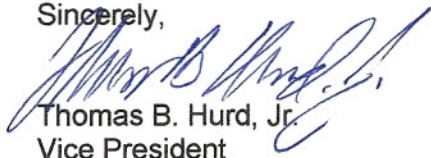
We hereby certify that the 4 mil CL-HDPE encasement tubing that we supply meets the physical requirements of the ANSI/AWWA C105/A21.5-10 , Section 4.1.3 (Tensile strength : 6300 psi for a 4-mil minimum thickness or 25.2 lbf/in. width minimum in machine and transverse direction. Elongation: 100% minimum in machine and transverse direction. Dielectric strength: 800 V/mil of thickness. Impact resistance: 800 g minimum. Propagation tear resistance: 250 gf min.)

The material is white in color. Valeron® is the trade name of this film. This material is manufactured in the United States of America.

Testing is done on each individual run to insure conformance with the above Standard.

This Letter of Compliance is applicable only to 4 mil CL-HDPE encasement tubing sold by Repcor, Inc.

Sincerely,

A handwritten signature in blue ink, appearing to read "Thomas B. Hurd, Jr.", is written over the typed name and title.

Thomas B. Hurd, Jr.
Vice President