



P.O BOX 404

11518 N. PORT WASHINGTON RD • MEQUON, WI 53092-0404

Phone 262-241-5900 • FAX 262-241-5376 • EMAIL: REPCOR@SBCGLOBAL.NET

POLYWRAP LETTER OF COMPLIANCE

TO WHOM IT MAY CONCERN:

Our 8 mil polyethylene encasement tubing is manufactured of linear low-density polyethylene film conforming to Sec. 4.1 Materials and Sec. 4.3 Marking of the ANSI/AWWA C105-A21.5-10 Standard, effective 10/01/2010. The Standard includes the following requirements.

Film is manufactured of 100% virgin linear low-density polyethylene conforming to ASTM D4976. Tensile strength: 3,600 psi for an 8-mil minimum thickness or 28.8 lbf/in. width minimum in machine and transverse direction. Elongation: 700 percent minimum in machine and transverse direction. Dielectric strength: 800 V/mil thickness minimum. Impact resistance: 600 g minimum. Propagation tear resistance: 2,550 gf minimum in machine and transverse direction. Thickness: minimum thickness of .008 in. (no minus tolerance).

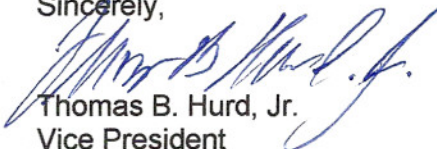
We meet the above standard.

All testing required by this standard has been conducted. These tests have been completed within the last year. All materials supplied are of the same type, quality, manufacture and make.

Repcor polyethylene encasement film is manufactured in the United States and thus meets the domestic manufacture requirement for the ARRA.

This Letter of Compliance is applicable only to polyethylene encasement film printed with our name on it and sold by Repcor, Inc.

Sincerely,

A handwritten signature in blue ink, appearing to read "Thomas B. Hurd, Jr.", is written over the typed name and title.

Thomas B. Hurd, Jr.
Vice President